

## MACK ANTHEM #42078 Basic Version


### Pocket Content:

- 1 X 12-Port Expansion Boards
- 1 X 8-Port Expansion Boards
- 1 X 6-Port Expansion Boards
- 2 X AA Battery Pack
- 14 X 15cm White Dot Lights
- 3 X 30cm White Dot Lights
- 1 X Warm White Strip Light
- 1 X 15cm Connecting Cable
- 1 X 30cm Connecting Cable
- LEGO Pieces

### Note:


Place wires on the surface or under the LEGO building blocks.

The wire can be place between the building blocks or under the block, but they should be placed between the studs correctly.

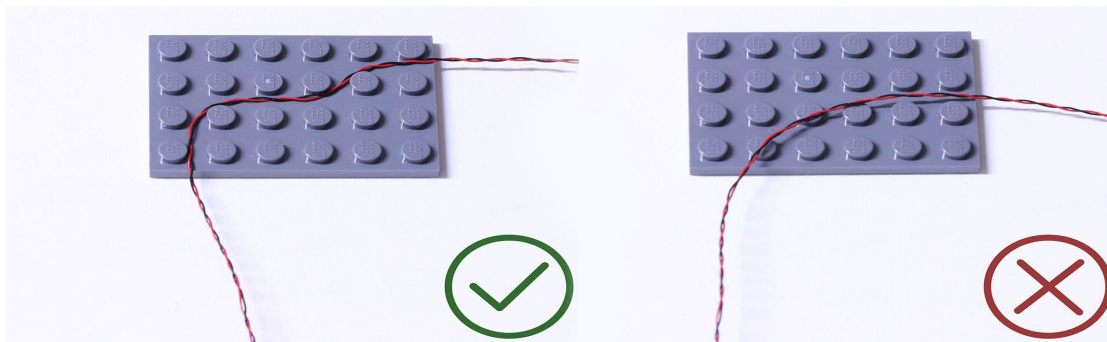


Insert the connectors to the ports.


Be careful when you are operating, there's only one correct way to insert, make sure the expansion board is upward, find the soldered "=" sign on the left of the port. When you are inserting, the side which the wires can be seen should be faced to the "=" sign and if you feel hard to insert, please stop, and don't force it, for that may result in bent pins inside the port or overheating of the expansion board.

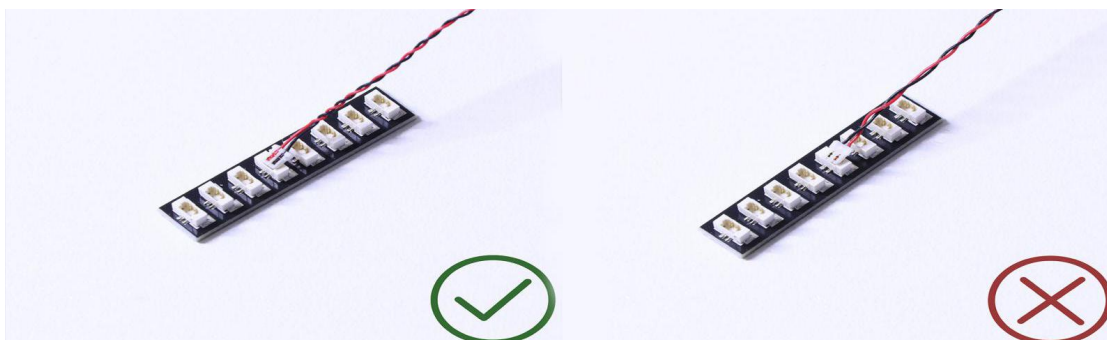

At this point, use the tweezers to straighten the bent pins.

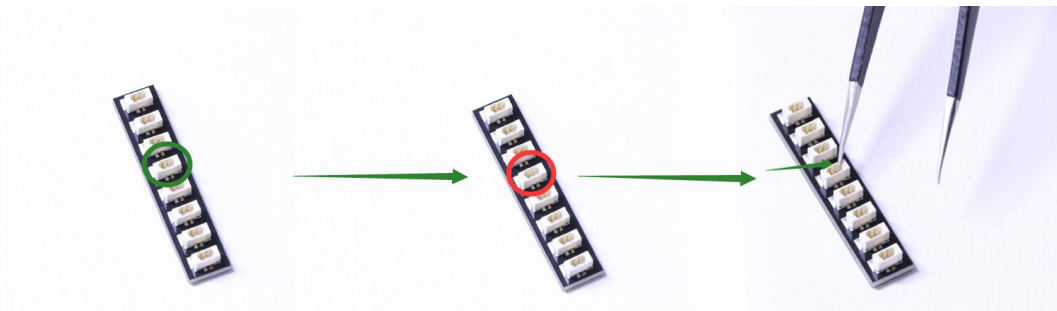


When installing dot lights, make sure they are correctly placed (Yellow LED package is exposed). You can put them either on the top of the studs or between studs.

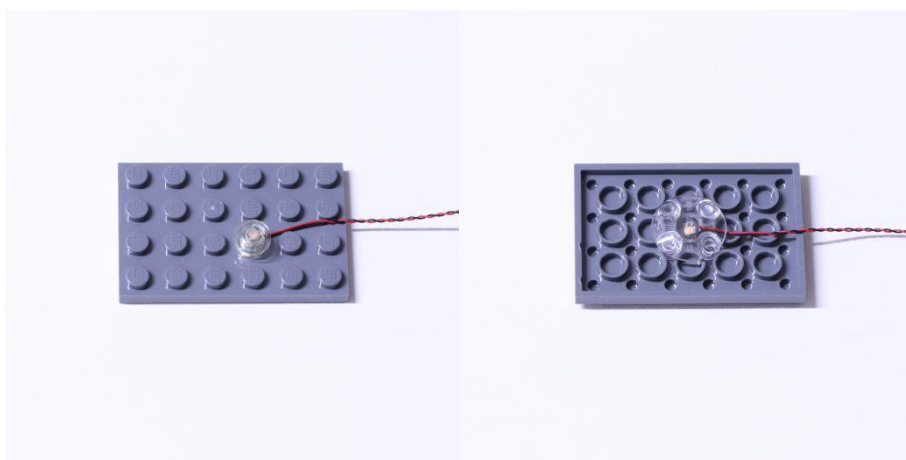


### Connecting cable connectors to Strip Lights

Take extra care when inserting connectors to ports on the Strip Lights. Connectors can be inserted only one way. With the Strip Light facing up, ensure the side of the connector with the wires exposed is facing down. If a plug won't fit easily into a port connector, don't force it. Doing so will damage the plug and the connector.

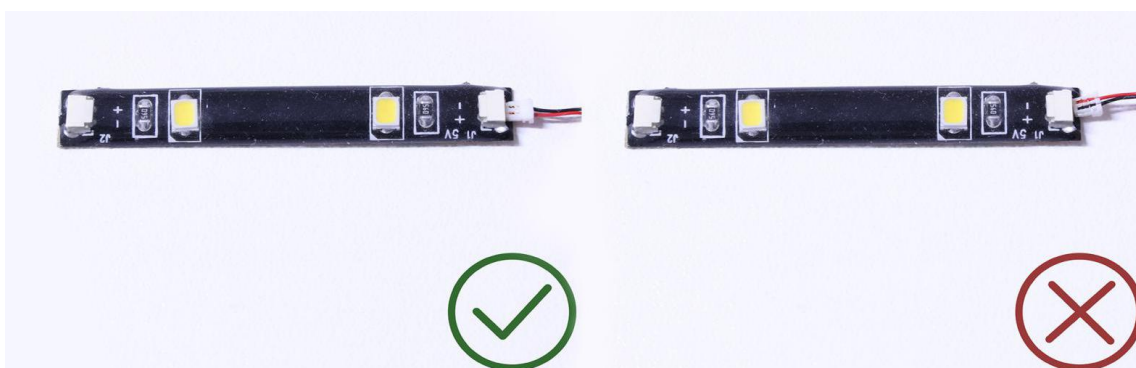

Finally, please pay attention to the positive and negative terminals of the battery when installing the battery case.

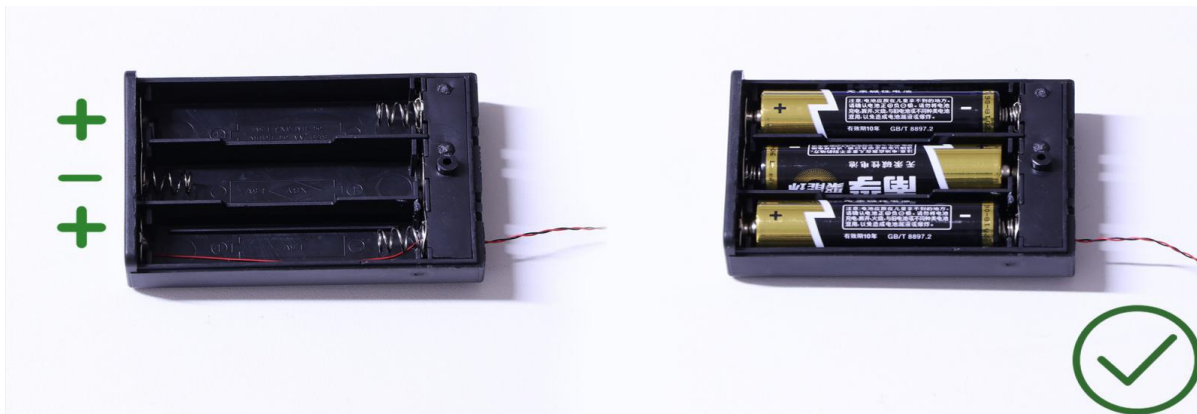


OK, Let's Begin!

## Instructions for installing this kit

Divide the car into 2 parts. Now we start with the first part of the headlights.



We first install the right front headlight, remove the pieces as shown in the picture, and take four 15cm white dot lights.

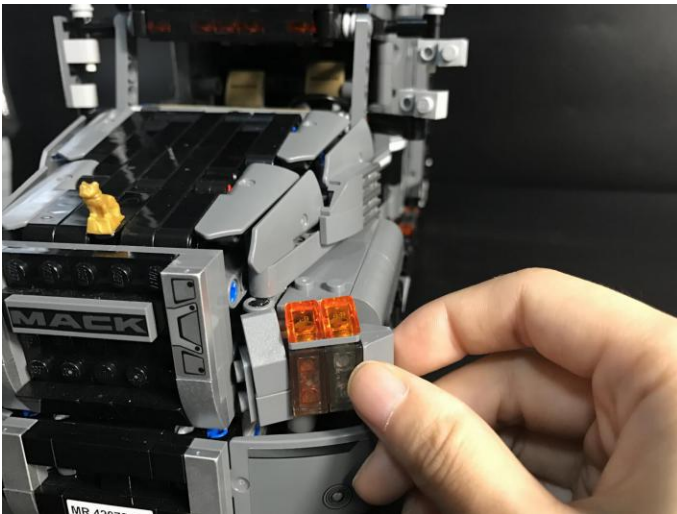


Remove the transparent part of the the piece.







Take the first dot light, put the lighting side up, and fix it with orange transparent piece. Pay attention to the line facing the rear.

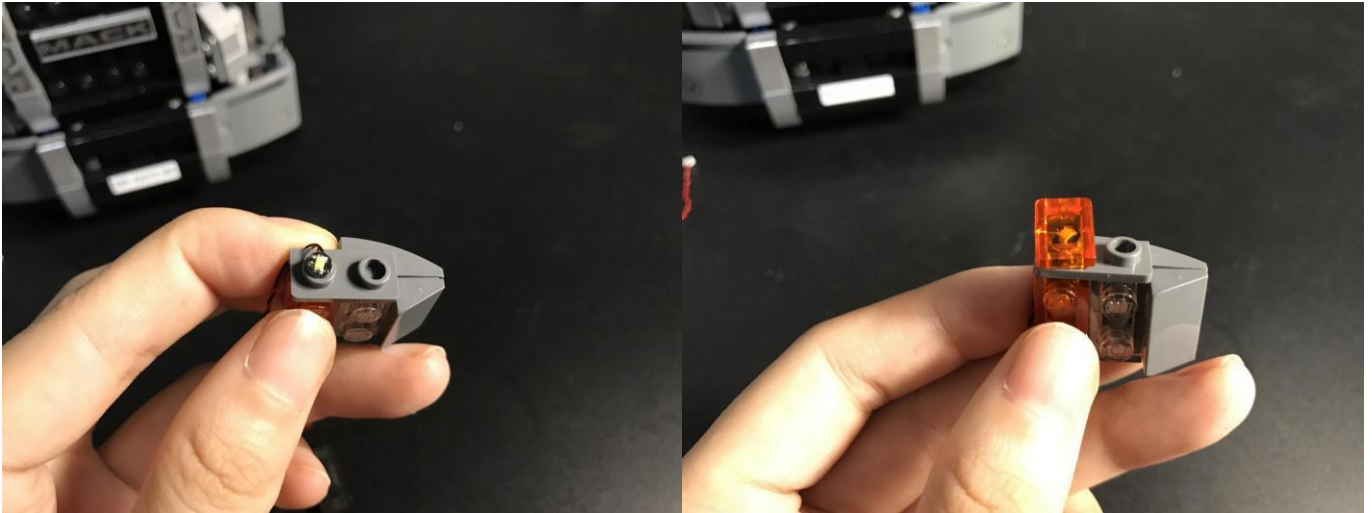



Repeat the operation to install the second dot light.

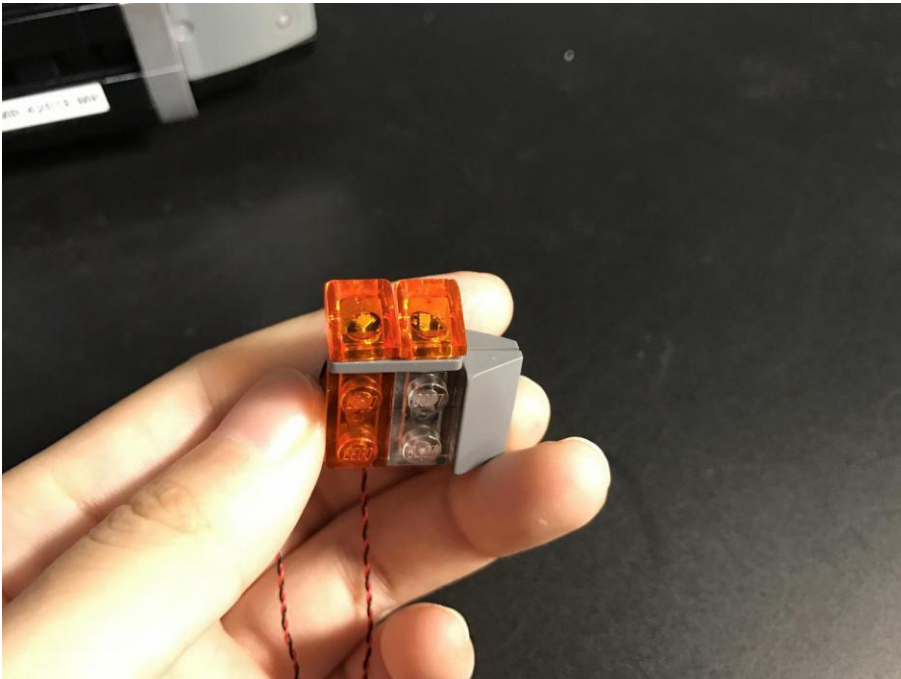



Take the third dot light, with the lighting side facing up and fixed it with a gray transparent plate.

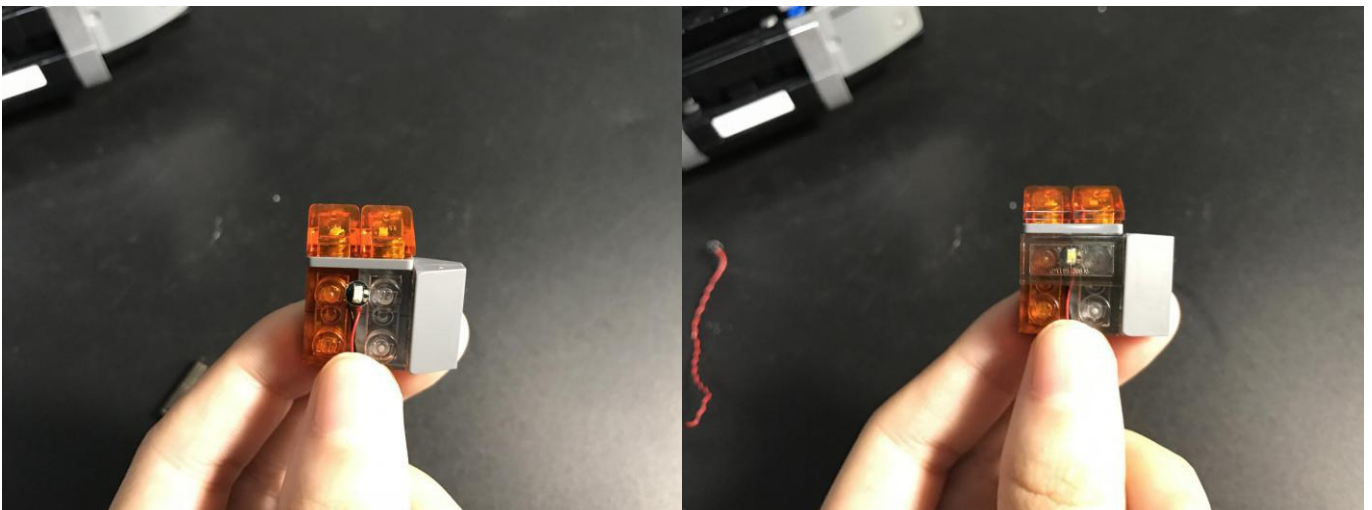

The fourth dot light is pressed on the third cable and fix it with a gray transparent plate. Install 4 dot lights and twist 4 cables into one strand.

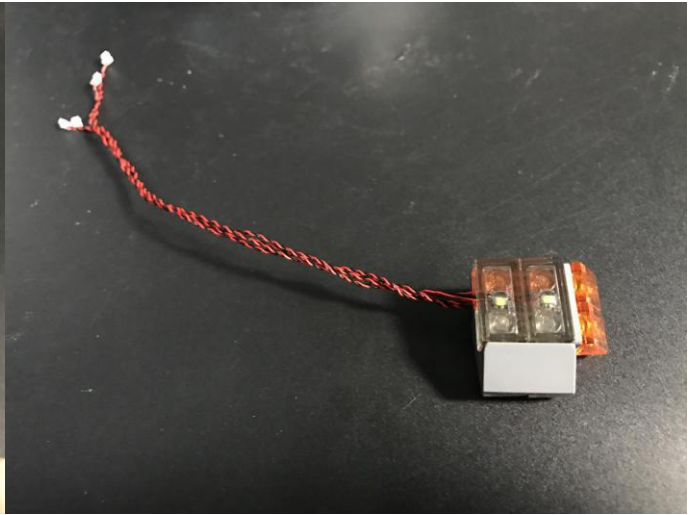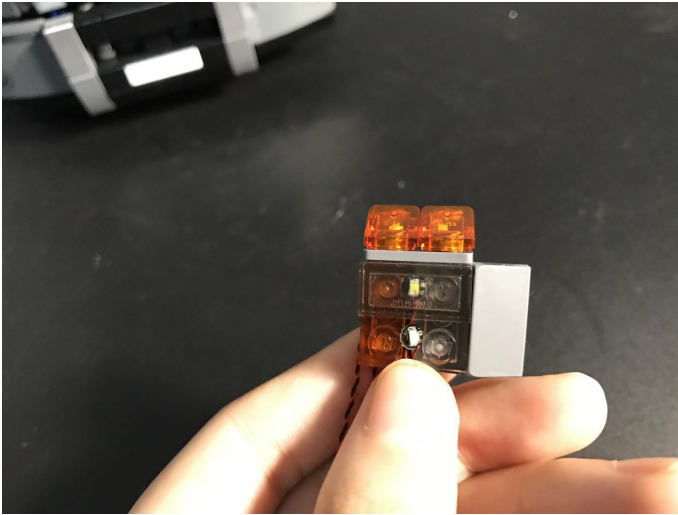

Lift the front cover, pull the cable into the front of the car, and reconnect the headlights.

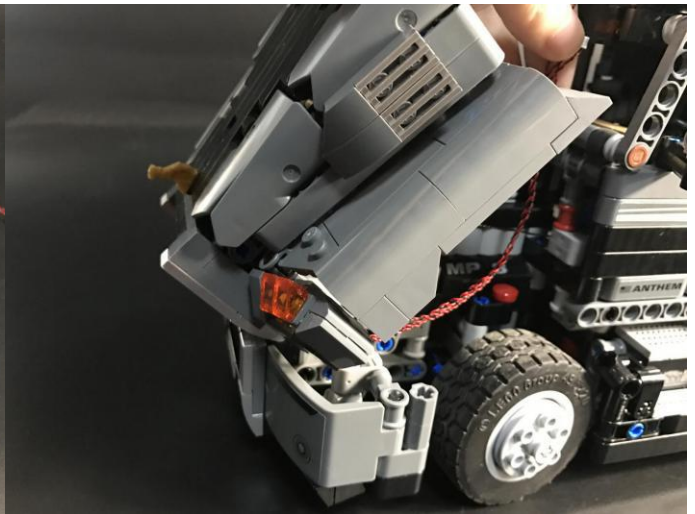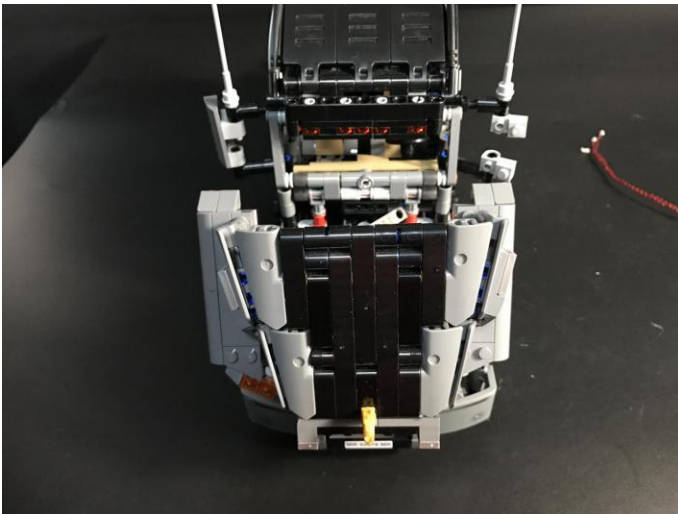


Take another 15cm white dot lights, then repeat the above operation to install the left side light.





Take a 12-port expansion board and a 30cm cable, as shown in the picture..




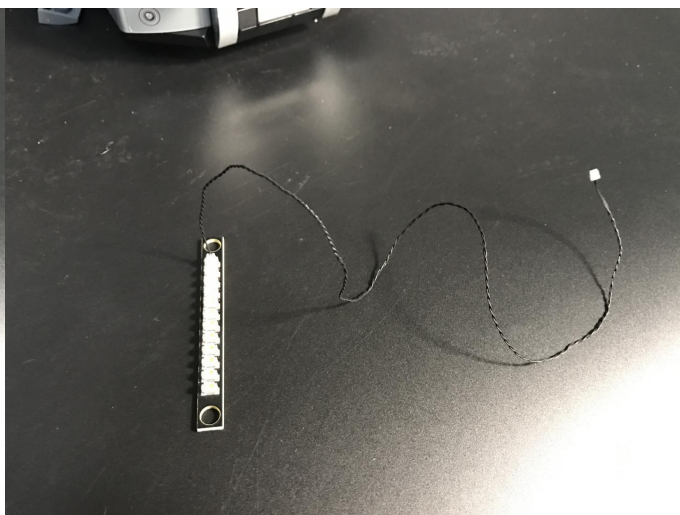


Take 2 pieces of adhesive squares, stick it on the back of the board, connect all the dot lights in the front of the car, and wrap it around the board according to the slack of the cable.

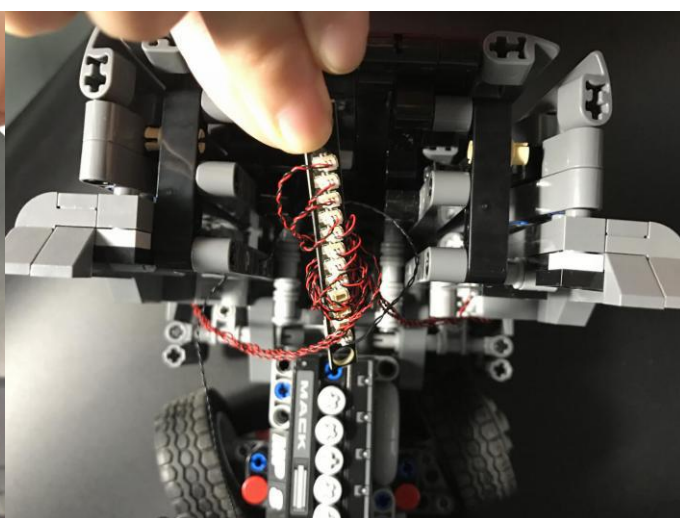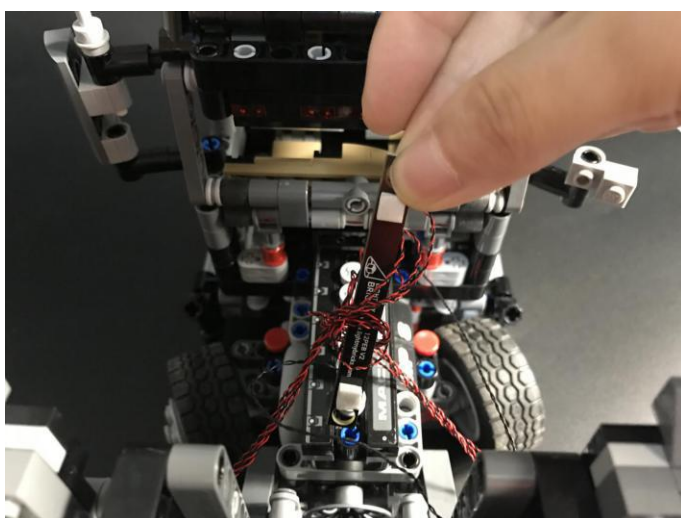

Fix the board to the inner wall of the front cover.

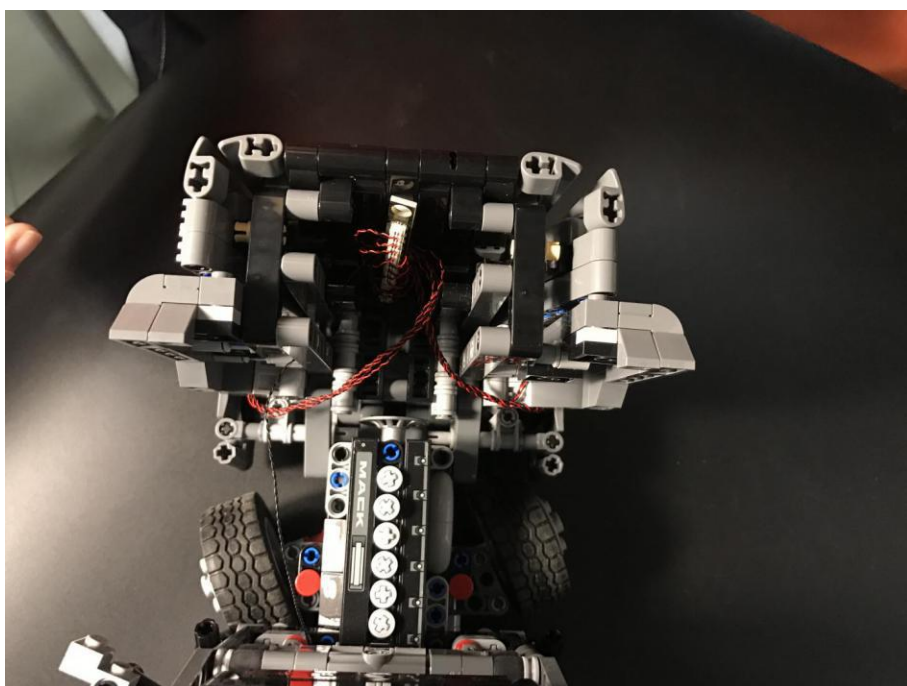


Pass the other end of the 30cm cable through the hole on the right side and then into the cab.

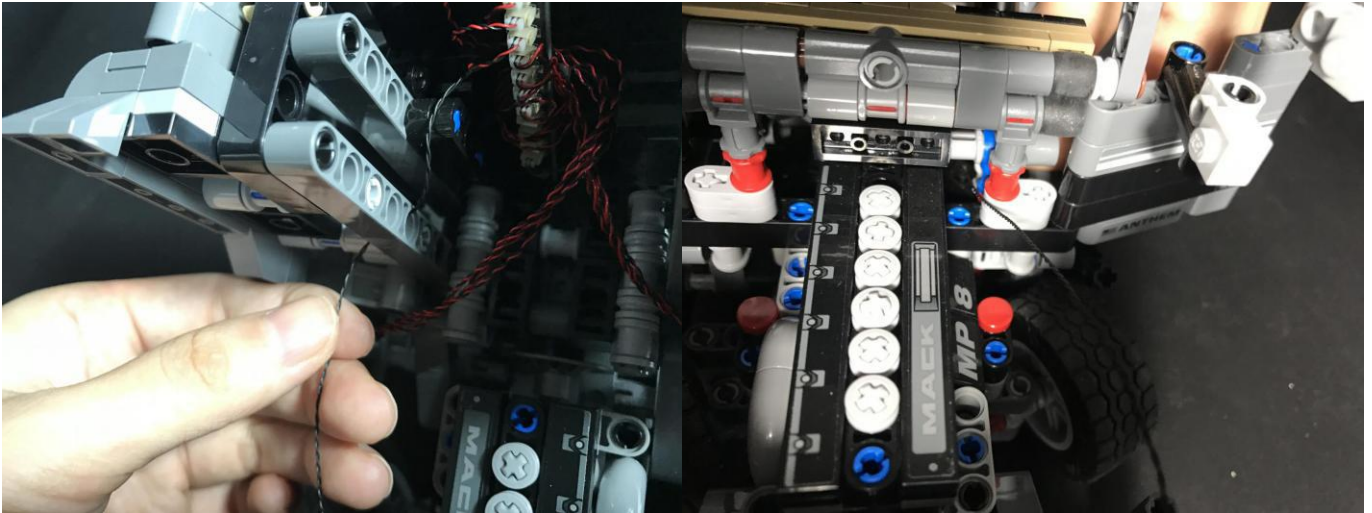

Now that we have completed the installation of the headlights, connect the power supply and test it!




Remove the driver's seat and pull out the 30cm cable that passes through the front of the car.

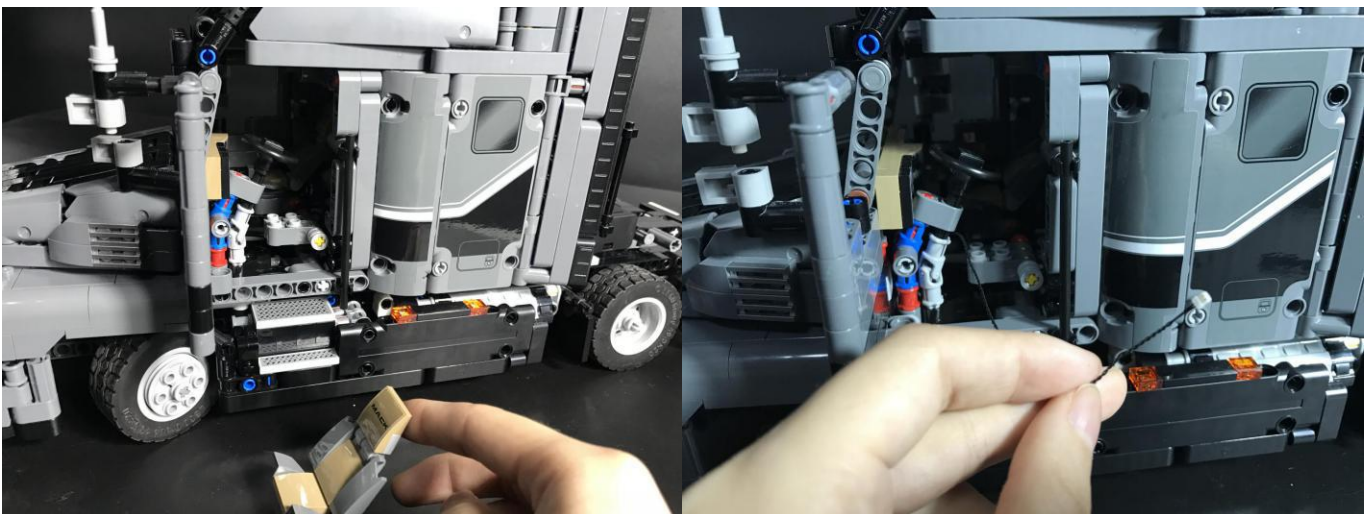


Pass the 30cm cable through the bottom of the driver's seat.




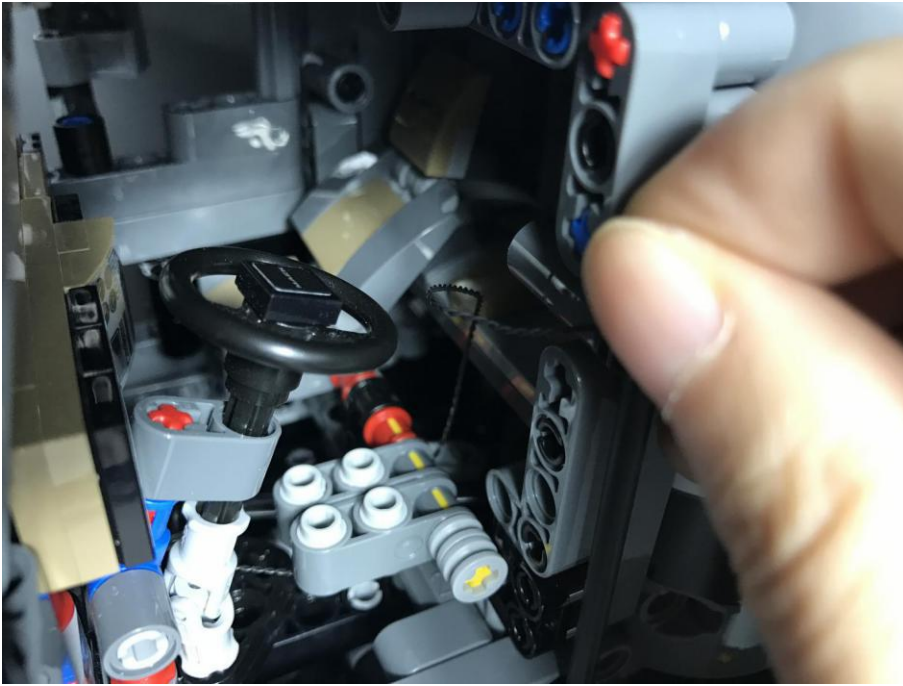


Take one warm white dot light, connect one 15cm cable, and the other end connect 30cm cable.

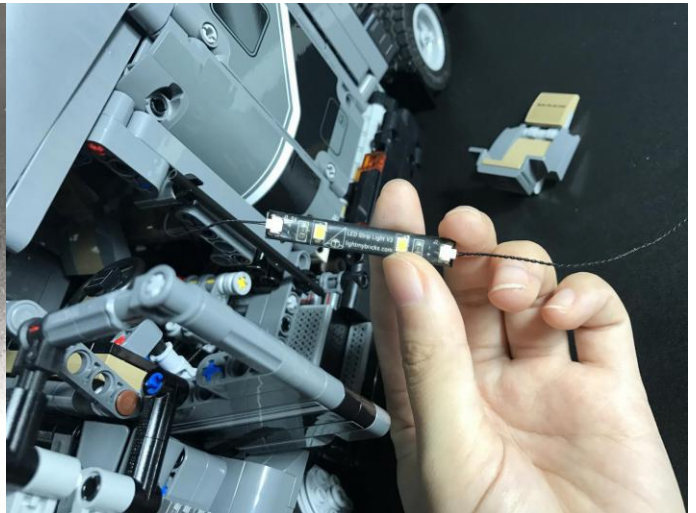


Remove the sticker on the back of the strip light, stick it to the roof, and the 15cm cable is facing the co-pilot direction. Restore the driver's seat.

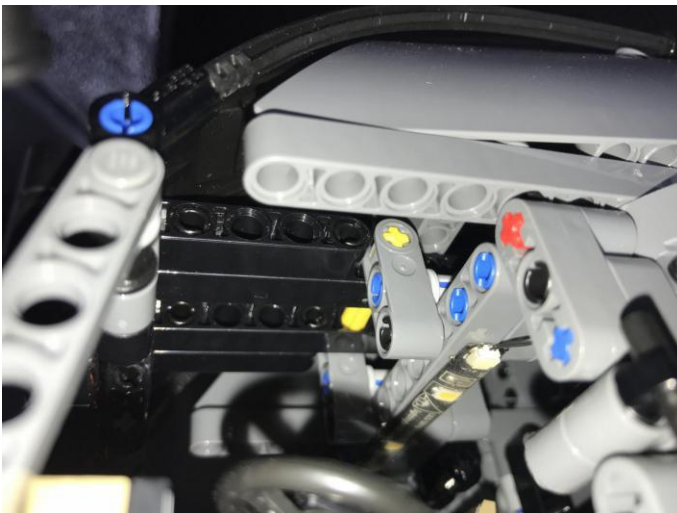

Go to the co-pilot side and remove the seat.

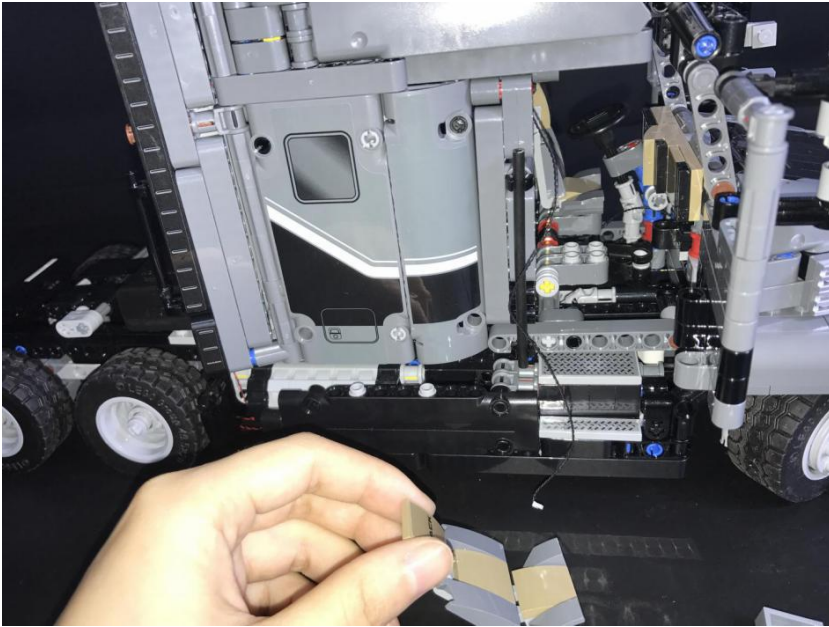


Pass the 15cm cable from the rear of the seat to the bottom of the vehicle and pull it out from the bottom of the vehicle.

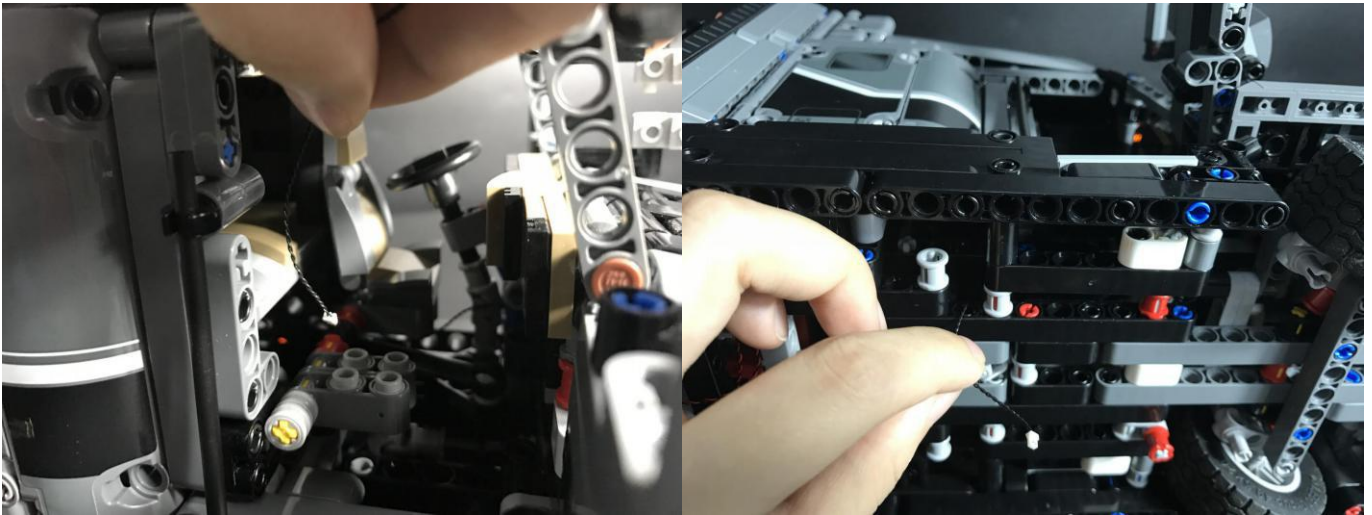


Take the second 6-port expansion board and connect the 15cm cable at the bottom of the car. Connect to the power supply and test it!






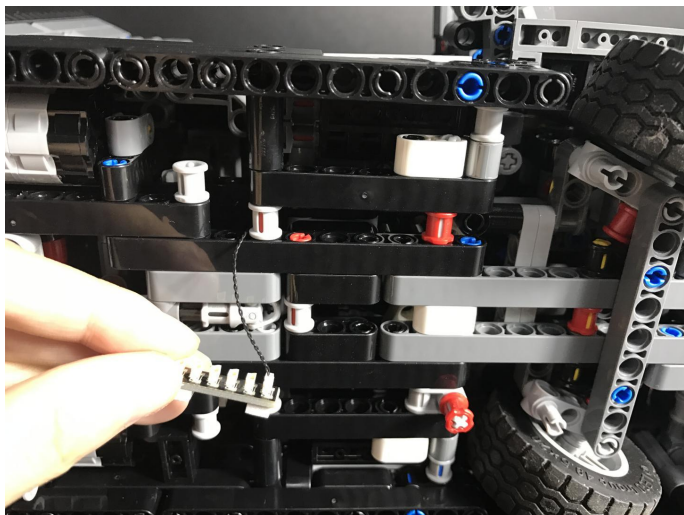

Now transfer the first part of the car to the rear of the car and remove the tail.

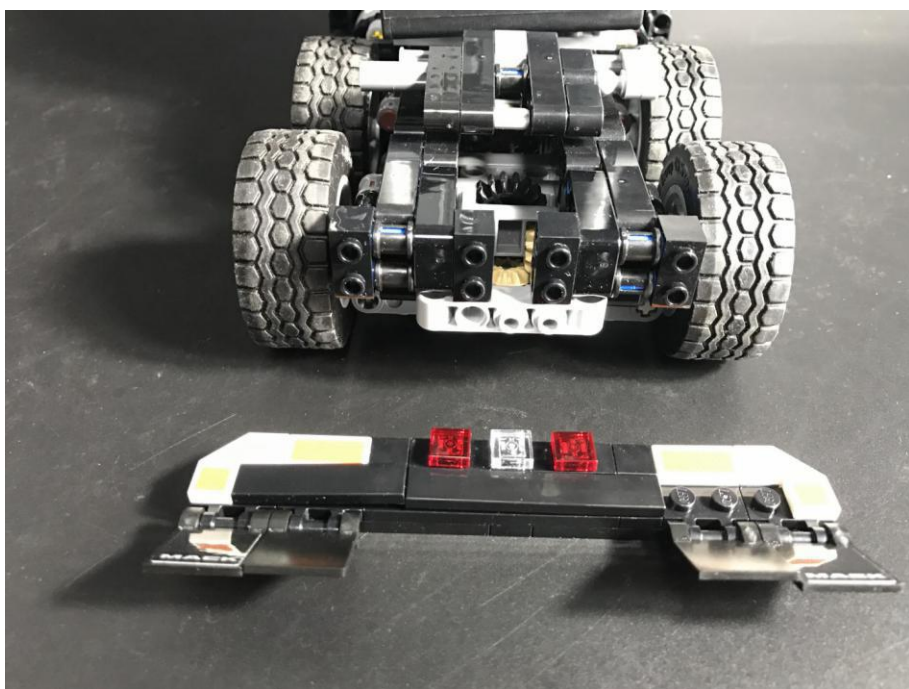



Separate the transparent part and the lower base plate.

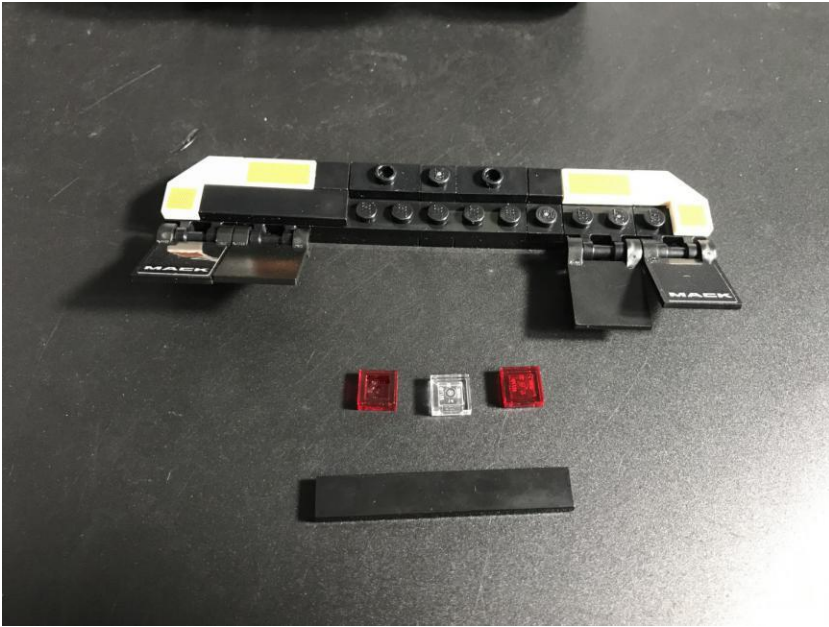


Take three 30cm white dot lights and one orange square transparent piece.





The three dot lights are sequentially fixed with a transparent piece, and the original white transparent piece is replaced with an orange transparent one.

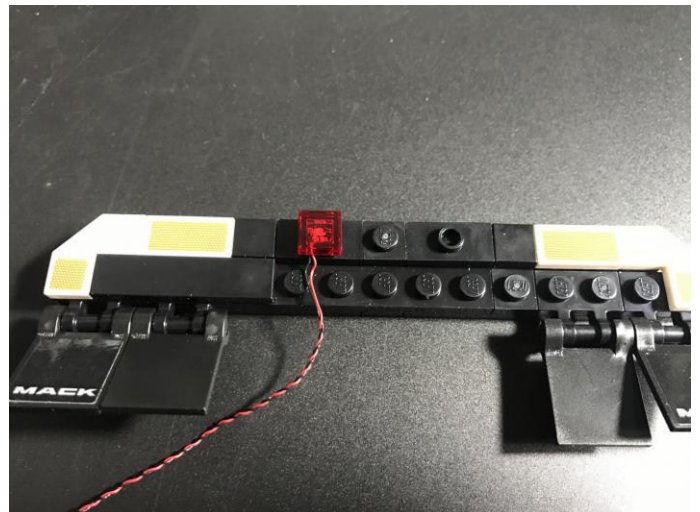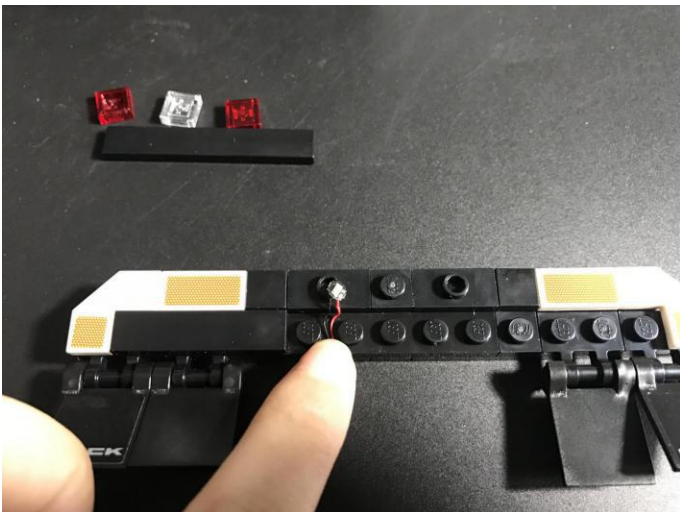





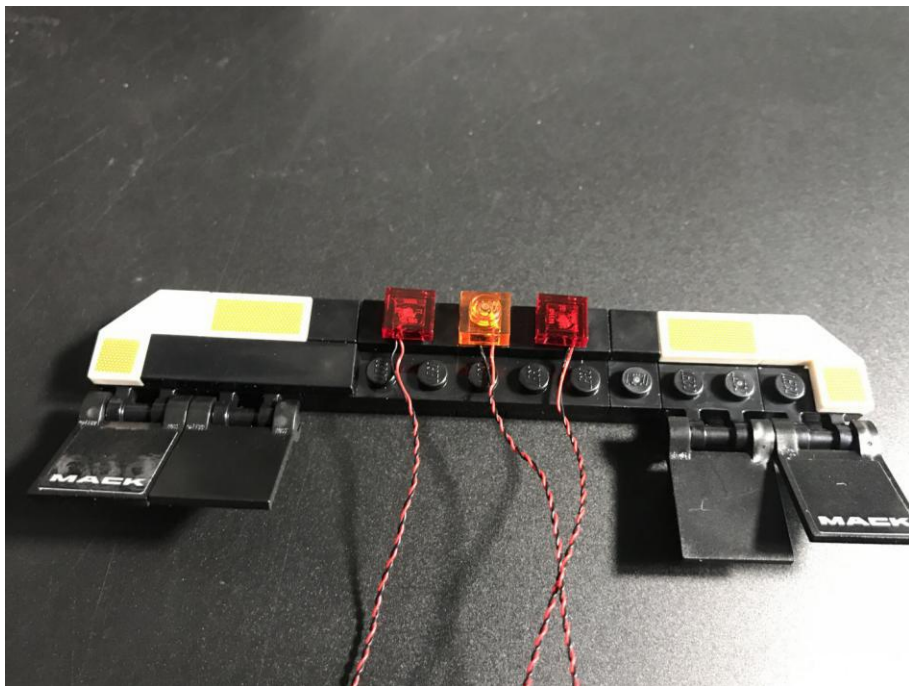


Press the 3 cables with the base plate to the lower stud gap.

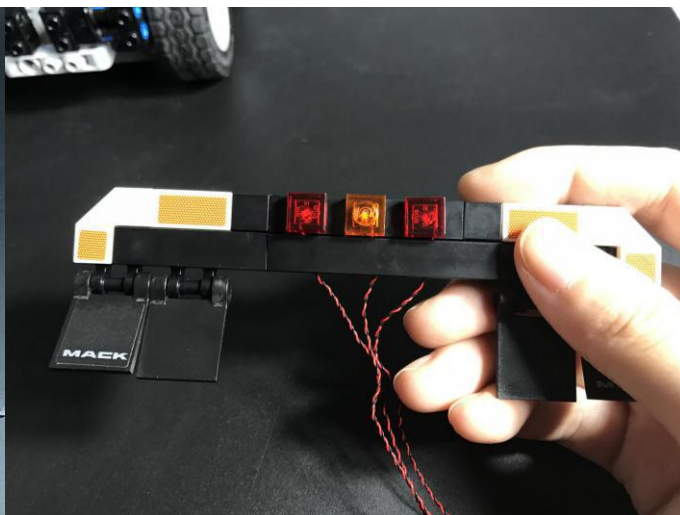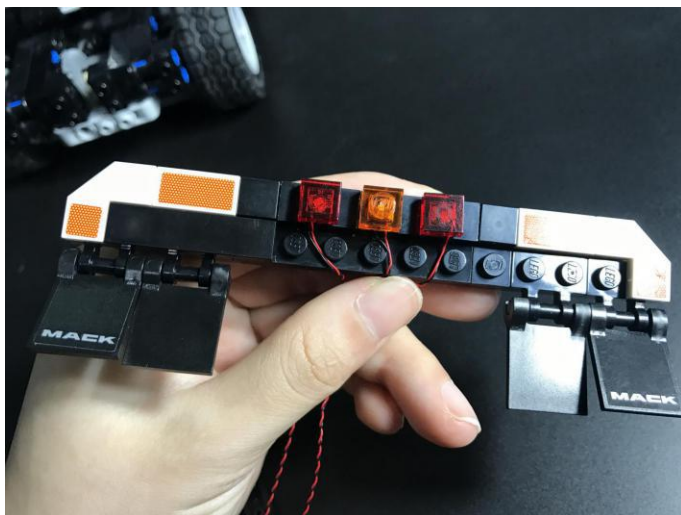


Screw the 3 cables to the right to make a strand.

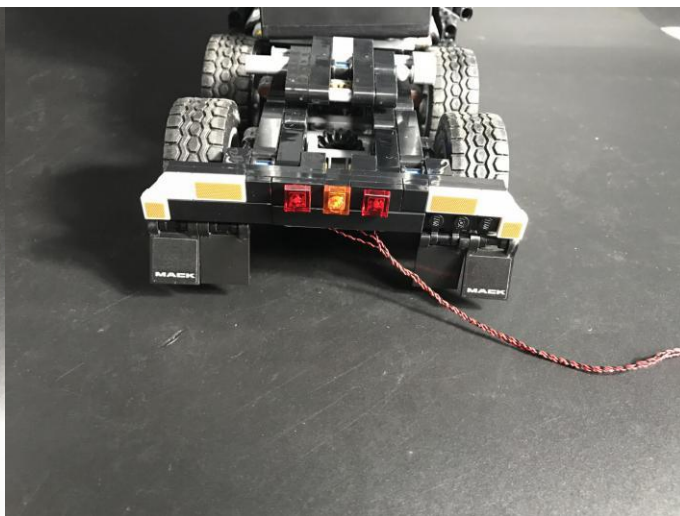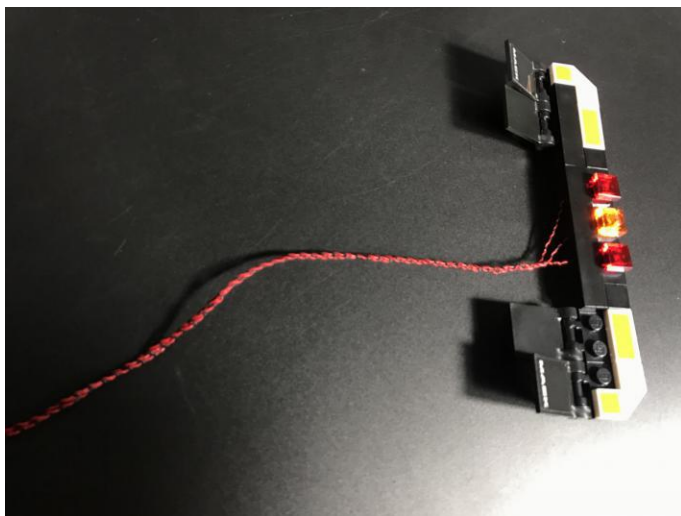


Put the car on the side.

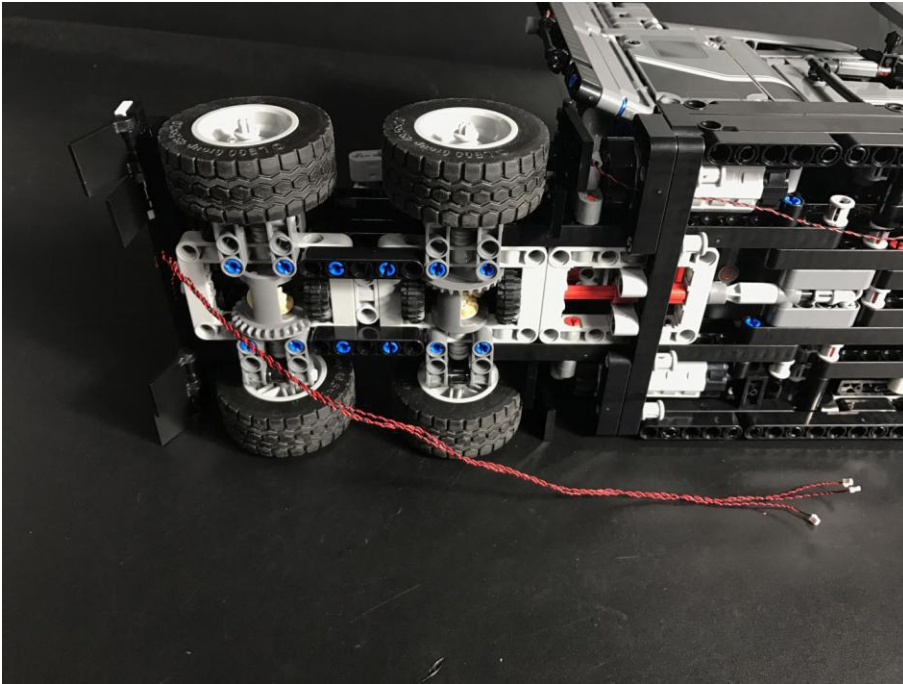

Pass the cable from the hole on the side of the car to the direction of the front.

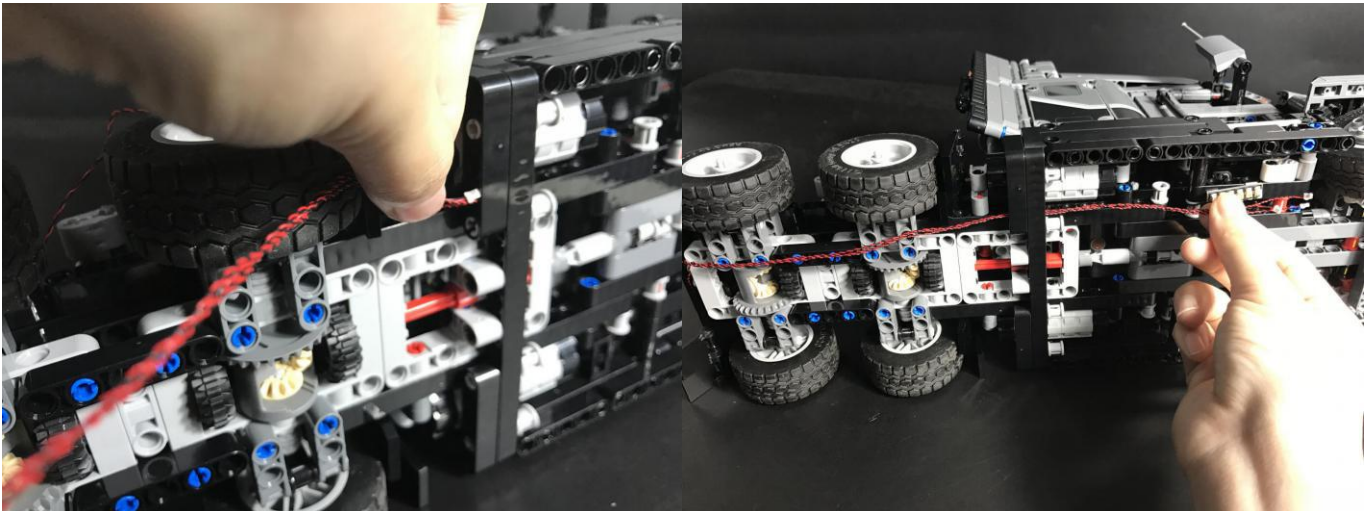


Take the battery pack, install the battery, stick the adhesive square on the other side of the light, fix the battery pack on the rear panel, and pay attention to the light upwards.

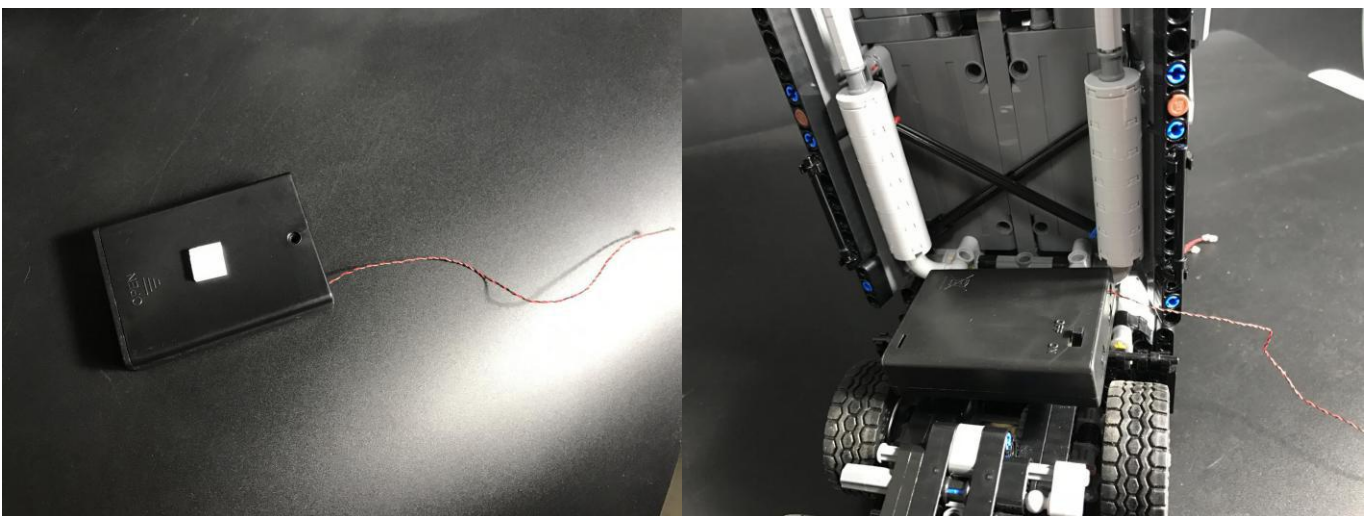


Pass the plug end on the battery pack through the hole in the bottom of the car and pull it toward the front of the car.




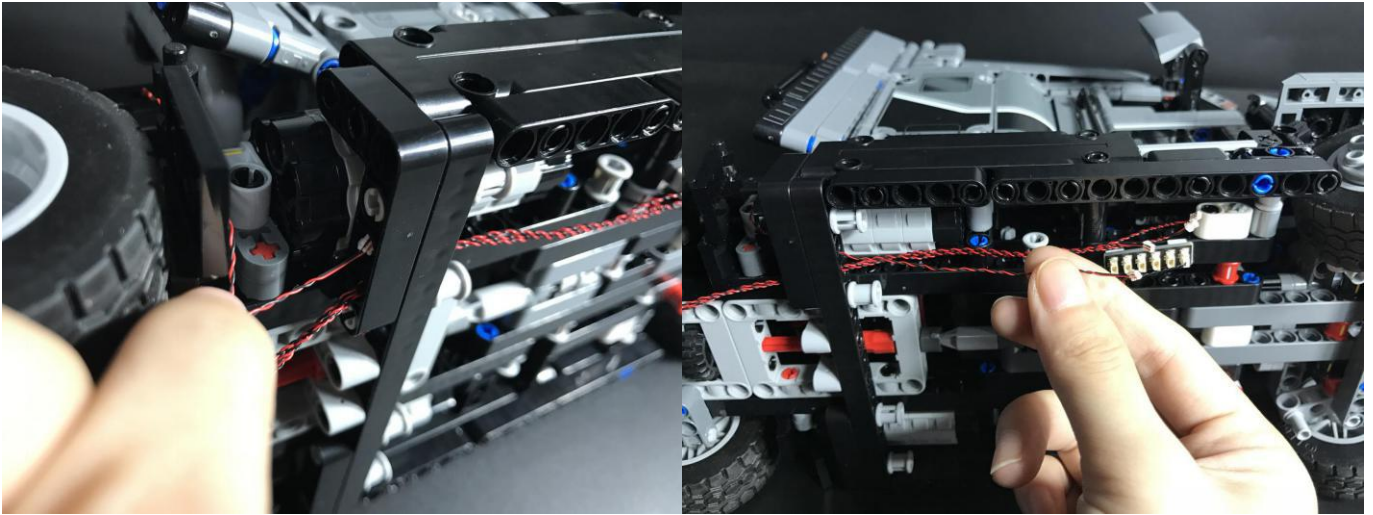


Connect the 6-port expansion board, wrap it around the board according to the slack of the cable, and fix the board to the bottom of the vehicle.

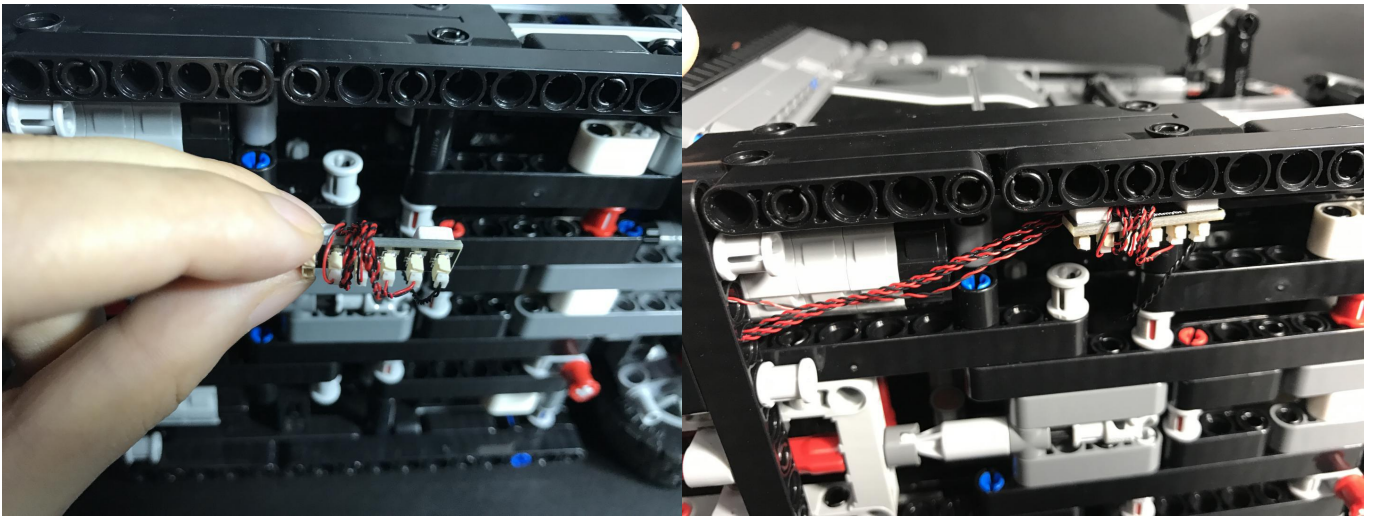



Now that we have completed the installation of the first part, open the light and enjoy it!

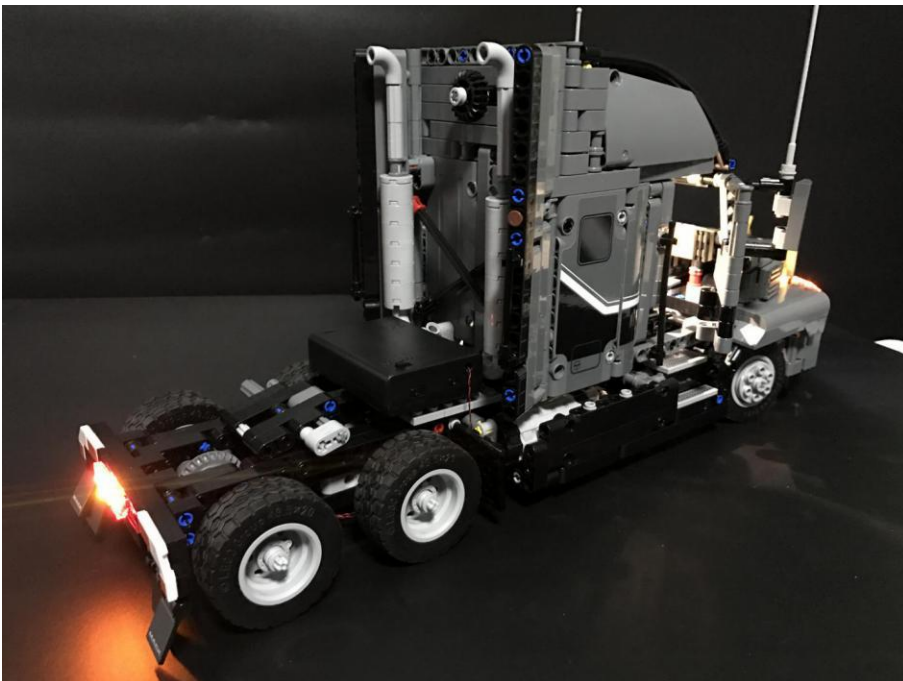

Then we start to install the second part of the taillights.

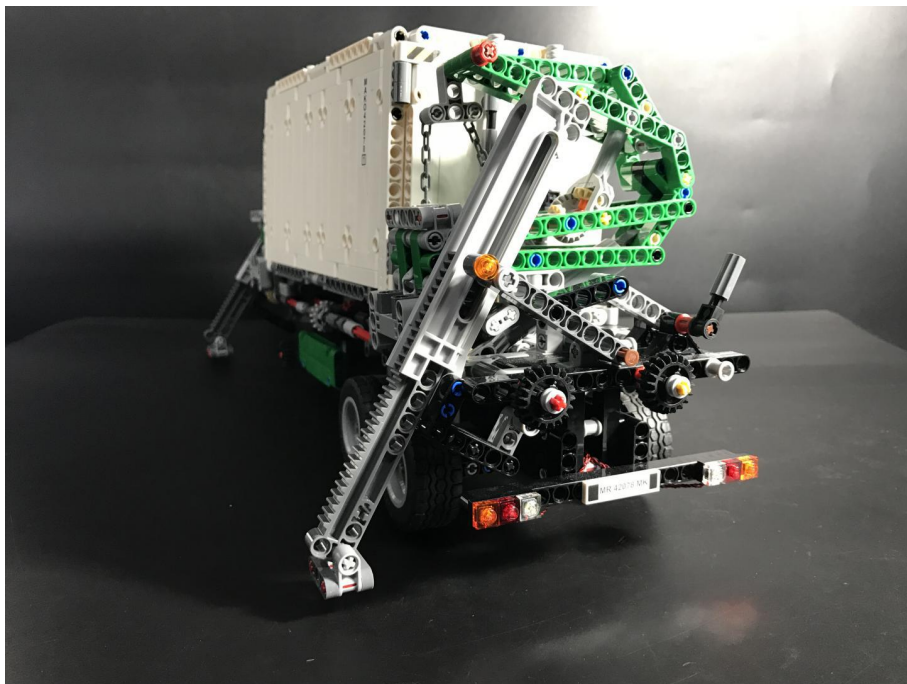

Remove the tail light on the right side and the light transparent piece.

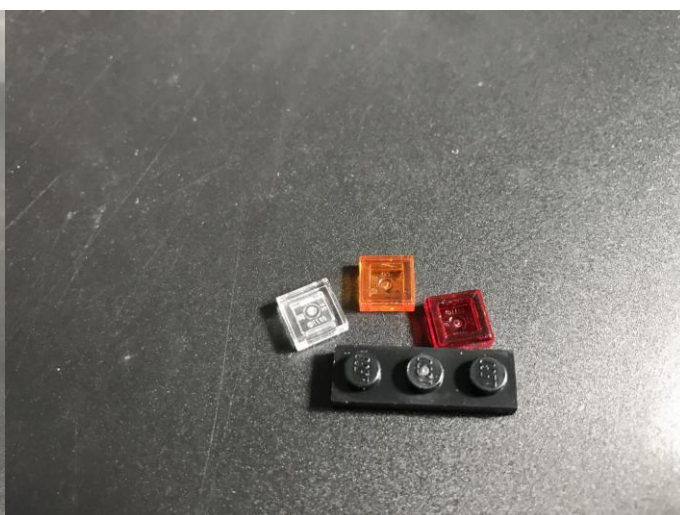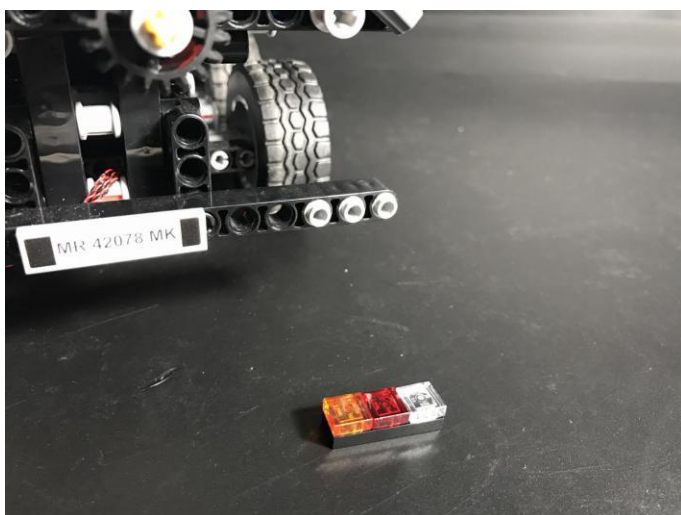


Take three 15cm white dot lights, and a orange, a red and a clear transparent pieces.







Repeat the previous operation, replace the original transparent piece with the transparent piece provided, and fix 3 dot lights.

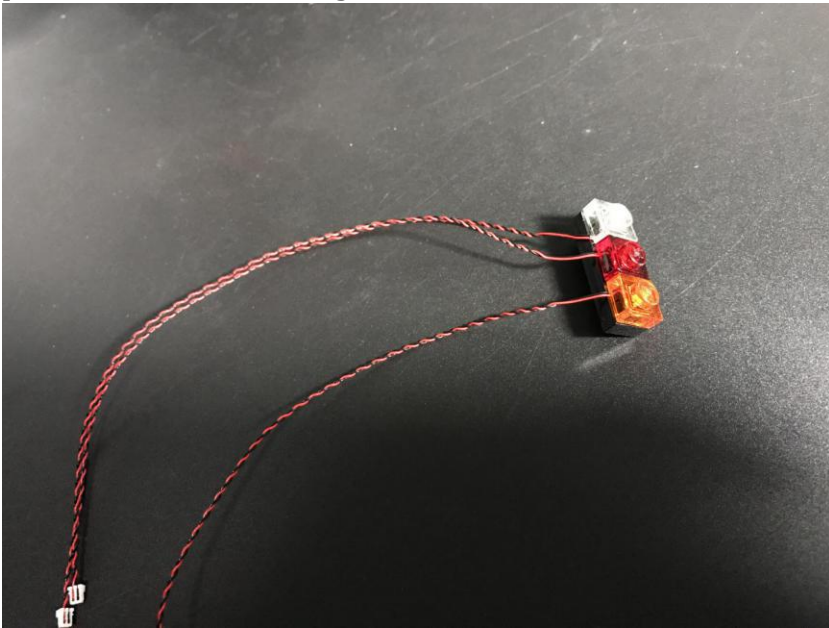


Screw the 3 cables to the left to make a strand, reconnect the taillight.

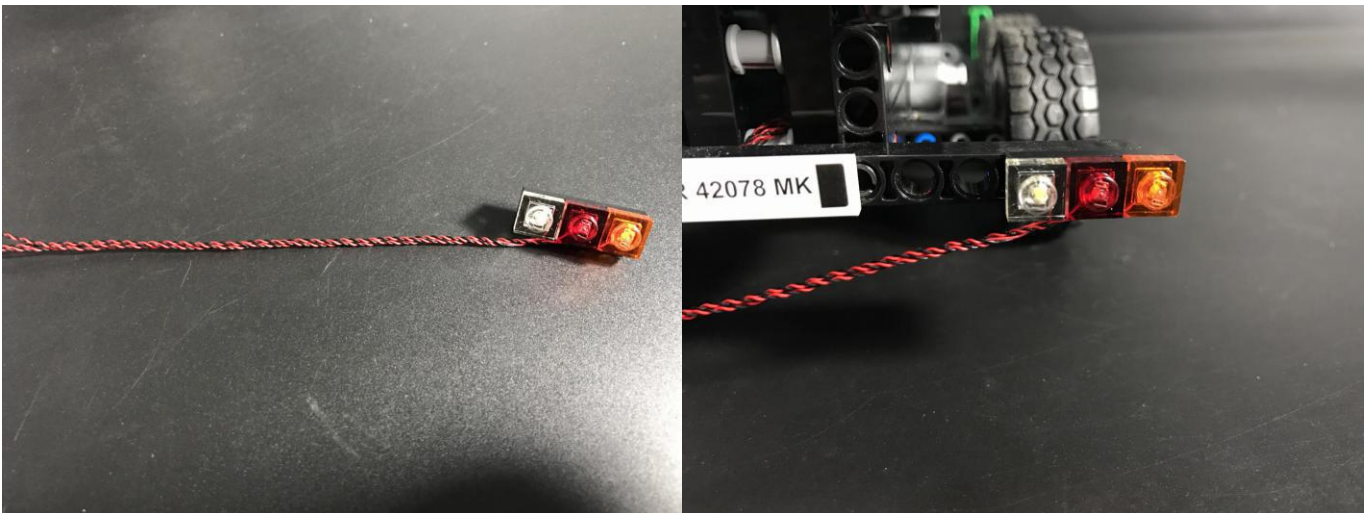


Take another three 15cm white dot lights, one for each of white, orange and red square transparent pieces. Repeat the operation and install the taillight on the left side.

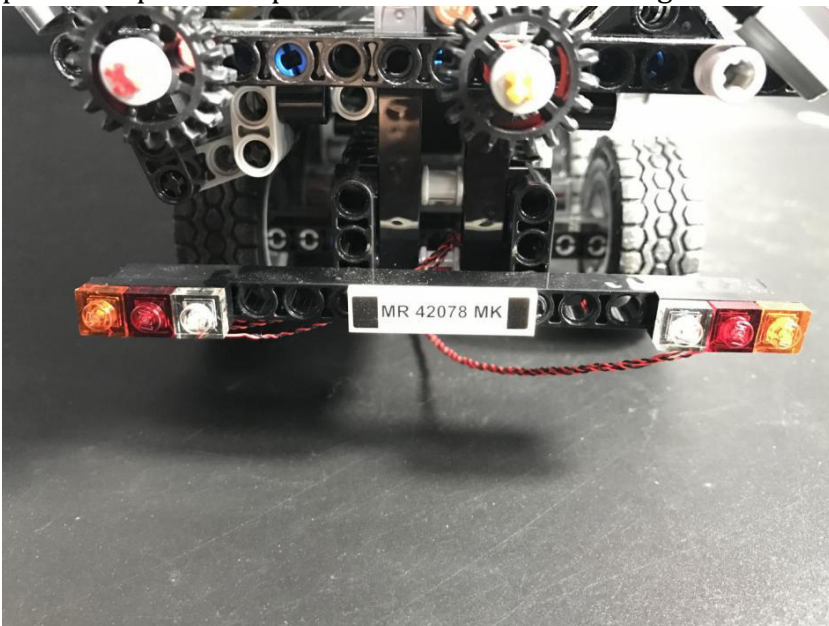


Place the car on the side, as shown below, thread the cable into the bottom of the car .

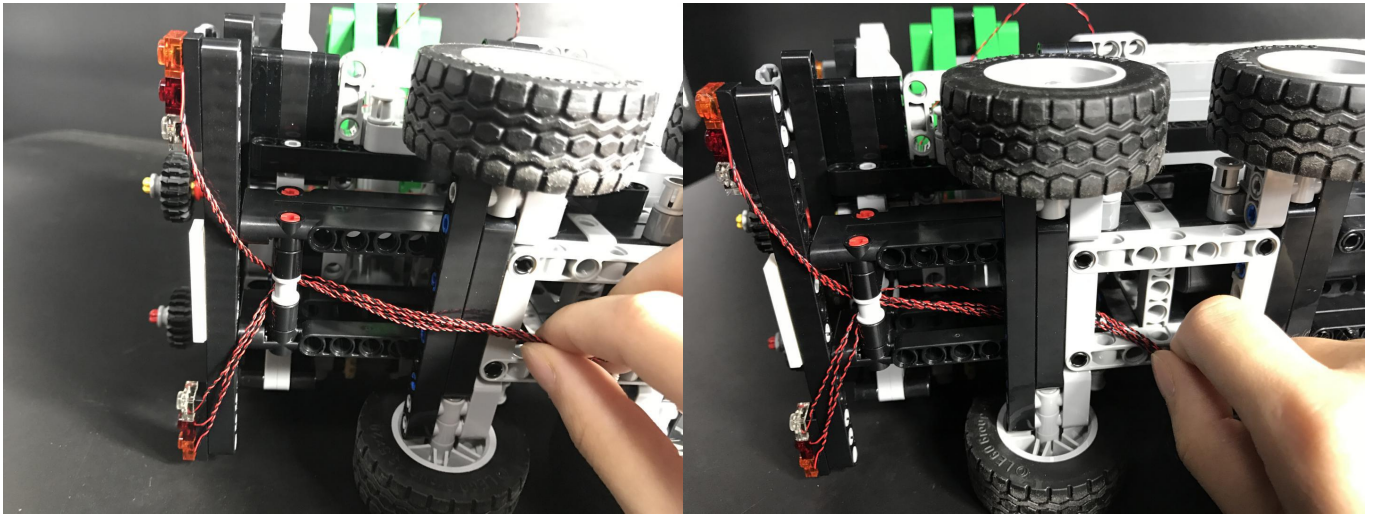

Take a 12-port expansion board, Stick the double-sided tape and connect all the plugs

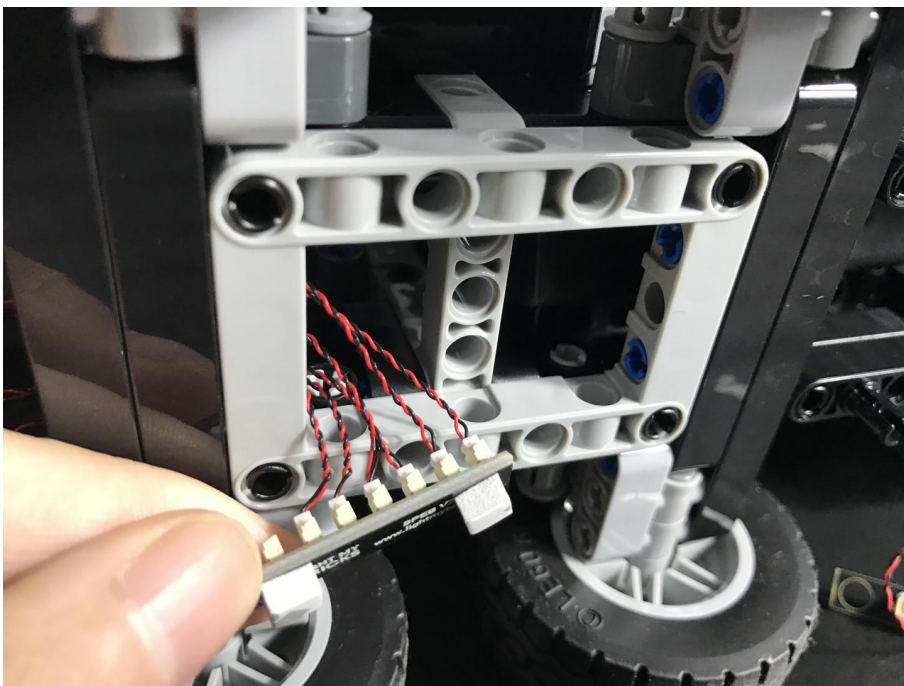

Take the second battery pack and install the batteries.



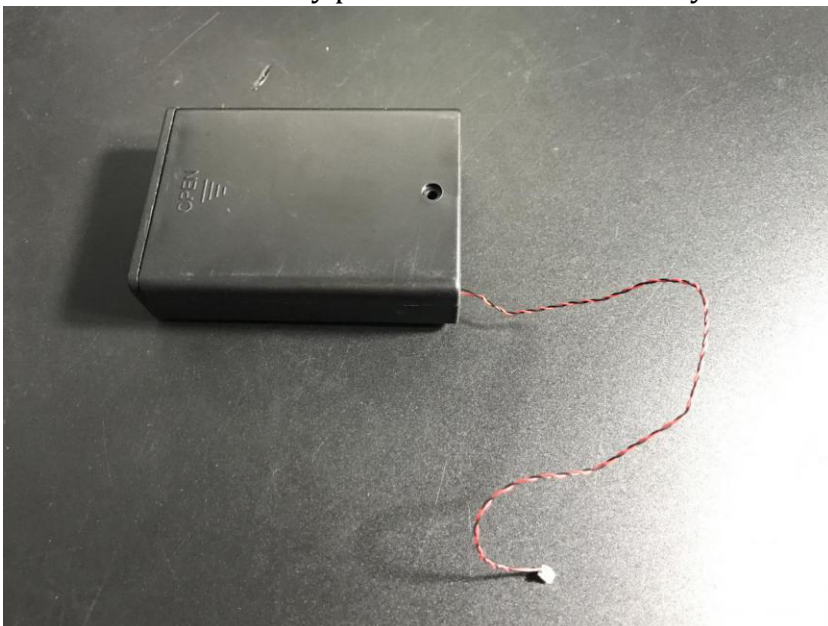




Put the battery pack cable into the bottom of the car, place the battery pack in the space as shown in the picture. Pay attention to the lighting side up.



Pass the cable of battery pack toward the expansion board and connect it to the board.  
And the socket stands on the inner wall of the car

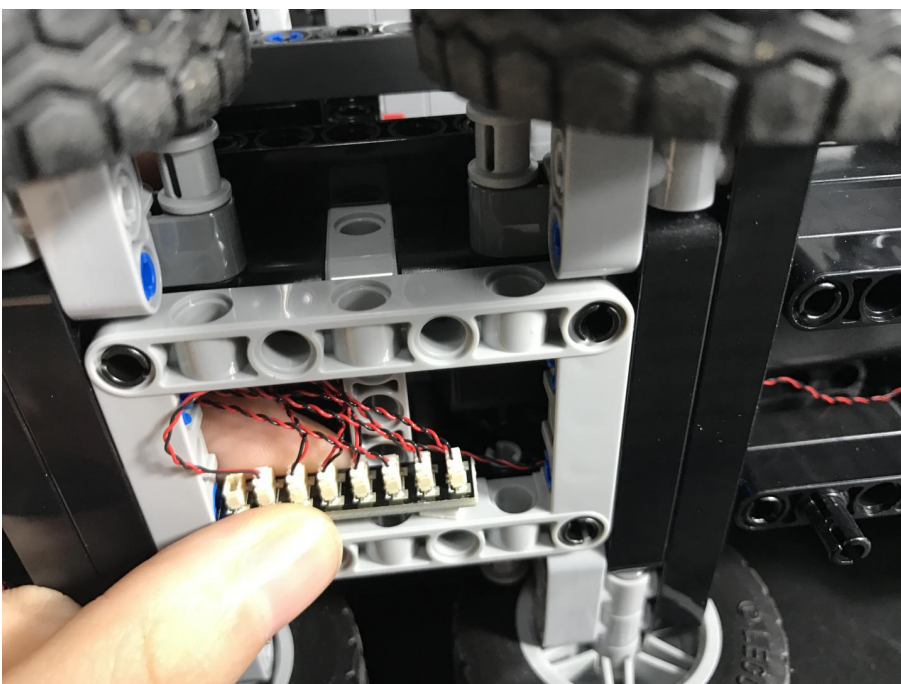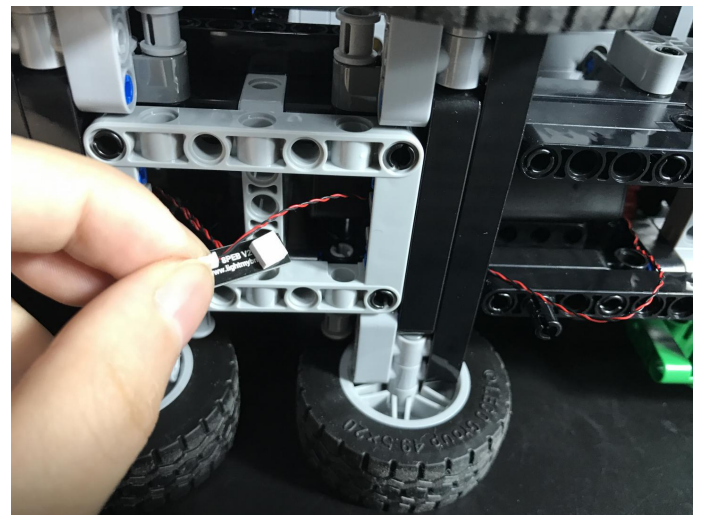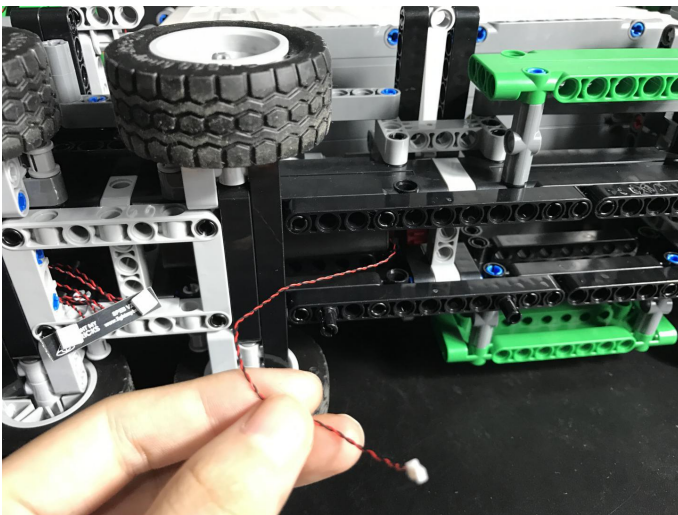

Now we have completed the installation of this kit. Turn on the light, I wish you a happy time!

